

Plain Tile Vent

Description


Available in up to four colours, with a 6,000 mm² airflow and can be laid down to 35° roof pitch.

If used for Roof Ventilation for 6,000 mm² space every 1 m for 5,000 mm² space every 2 m

Guidelines for use

Fitted whilst laying the roof (can be retro fitted as well).
Roof membrane needs to be cut to allow penetration into roof space, with membrane folded back over top batten.
Can be used in conjunction with Adaptor ULTI3PTVA and Flexi-Pipe ULTI3FP if connection required.

Specifications			
	Plain tile vent	Plain tile adaptor	Flexi-Pipe
Product code	ULTI3PTV	ULTI3PTVA	ULTI3FP
Free airflow	6,000 mm ²	-	-
Unit of measure	10/carton	15/carton	50/carton
Weight	605 g	425 g	225 g
Material	Acrylonitrile Styrene Acrylate (ASA) and Polypropylene (PP)	Polypropylene (PP)	-
Manufacturing process	Injection moulding		-
Colours	Grey, Brown, Red, Terracotta	Black	Black

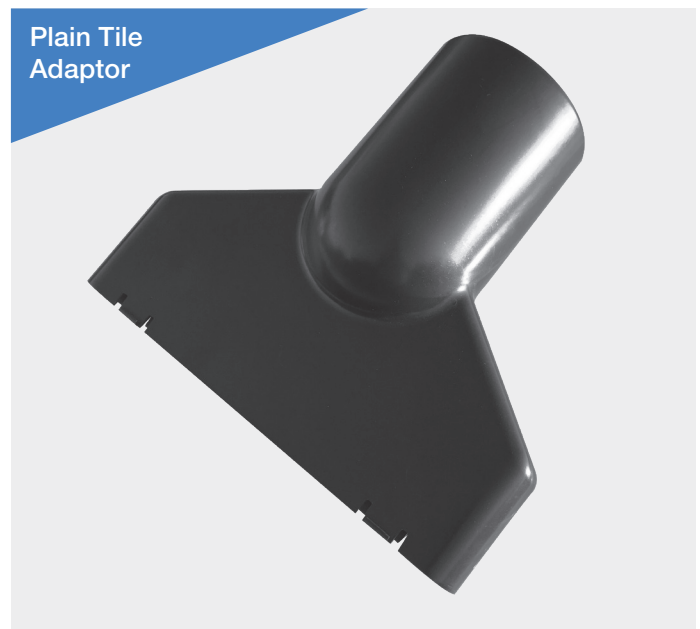

All products are covered by our 15 year Durability Warranty terms and conditions can be found on our website.



All plastic products are made in UK.



ulti-mate-roofing.co.uk

For more information contact us: 0345 565 3101 | sales@ulti-mate-roofing.co.uk

Ulti-Mate Roofing & Building Products | Bee Mill, Shaw Road, Royton, Oldham, OL2 6EH